

# Quality management aided design

Cezarina Adina TOFAN

Spiru Haret University, Bucharest, Faculty of Accounting and Finance, Campulung, Rumania

## Email address

[cezarina\\_adina@yahoo.com](mailto:cezarina_adina@yahoo.com)

## To cite this article

Cezarina Adina TOFAN. Quality Management Aided Design. *International Journal of Service Science, Management and Engineering*, Vol. 1, No. 1, 2014, pp. 1-5.

## Abstract

The development of CAD technique (Computer Aided Design) and CAE (Computer Aided Engineering) creates new possibilities for an important integration of reliability from the projection process of stamps and dies. Methods and production means of the mechanical industry are disturbed by the presence of computers, robots, programmable controllers, numerical controls, etc. After the appearance of the numerically controlled machine tools, the main developments were marked by an accelerated development of the computational techniques, the processing centers, the group technology, sensors, the geometric modeling techniques and graphical data processing, simulation, CAD / CAM systems, systems and diagnostic techniques, high-level programming languages and the artificial intelligence.

## Keywords

Reliability, CAD Technique, Quality

## 1. Introduction

The specialists think when a product leaves the compartment of the project there are established almost 70% from the all spending for its making. So, during the projection, the base cost can be determined and it can be changed with difficulty. For reducing those costs involves a lot of time and effort.

The development of CAD technique (Computer Aided Design) and CAE (Computer Aided Engineering) creates new possibilities for an important integration of reliability from the projection process of stamps and dies. Spreading of the network computers and the highest methods of simulation on them give to the project engineers and the specialist in the reliability possibility to use dates and the methods of analysing during the projection for:

- To estimate for different reliability during stamps and dies are created in a CAD field;
- To identify ways of spoiling and to analyse the faults for reliability prediction with a stimulate on the computer before making and testing the stamps and dies prototype;
- To stimulate the process of making and to anticipate

the changing effects in the projection regarding the cost and the efficiency for the process of production;

- To find and apply the rules which can help the engineers in the optimisation for special features of reliability with others stamps and dies.

The design process is considered as an activity based on the induction, deduction, intuition, experience and creativity. Through the information technology it is possible to gradually transfer the experience, deduction and induction from the design engineer to the CAD system, so, to become an intelligent system

## 2. Main Content

Although the dates for mechanic system are fewer, with an adaptation of methods of simulation and the CAD packets, we can create a field for working so that to become a full part of mechanic project for reliability.

For stamps and dies projection it can be used high methods of simulating and CAD packets for geometric modelling, structure, dynamic and thermal analyses. Nowadays some of these methods are used in the design Department, but it is necessary the integration and the applying of these methods both by the projection engineers

and the specialist of reliability.

In the design of cold pressing processes is very important to establish appropriate nominal value of the process parameters. The aim is to identify their levels of design parameters such as process characteristics to be insensitive to noise is subjected process.

Design parameters is essential step in achieving cold pressing processes high reliability, in terms of materials and components characterized by variability and can be damaged relatively easily.

If the process parameters are designed so that the characteristics of reliability to be resistant to noise makers, will get the proper parts, even in the presence of process variability components.

## 2.1. Methods

Using of new methods CAD/CAE leads to a better projection of stamps and dies with involving of specialists in reliability and offer:

- Using by projection engineers of analyse results for reliability and optimisation;
- Using of simulation techniques till the beginning of projection;
- Increasing of organization capacity of dates, less the times for feed-back to assure the automatic bringing up-to-date;
- Improving the projection, with involving of specialists in the reliability in the projection process, both directly and implementation of projection algorithms for reliability use by the designers;
- Improving the communication and propagate the dates between the designers and specialists in the reliability.

The immediately potential for applying the CAD/CAE methods in the projection for the reliability of the stamps and the dies depends by the using:

- The graphs based on the station for working which may CAD interactions projection with the methods of simulation at moderating costs;
- The powerful working stations, equip with the last generation of computers, at the convenient costs;
- The network of computers equip with soft which allowed to use entire working station and servers and the access in a few time at the central base date;
- The transition of CAD industry to production of projection system on the computer which allowed to create geometric models which can support the analyse and simulation projection;

In conclusion, using this method allows the development of a process with minimal cost and resistant to changes.

The system must allow all those entitled to act according to their assigned privileges (consolation, insertion, correction, modification, etc.) and in the perfect knowledge on the stage where this information is (under the development, under the stage of correction, final, etc.) corollary of these features consists in an organization of the data based on a standard configuration and a normalized of

the data exchange.

The virtual enterprise (zero defects, zero paper, and zero inventories) is now the ideal that is wanted to be touched.

In the CAM system there is FMS - Flexible Manufacturing System. It is defined differently from a country to another, but in essence it is a manufacturing entity capable to produce a wide (family) of discrete products with a minimal manual intervention. It includes work stations equipped with the capacity of production (numerically controlled machine tools or other equipment assembly or treatment) linked by a material handling system for the purpose of moving parts from one work station to another, serve as a fully integrated system with a complete programmable control.

An intelligent system for the computer aided design will be to provide the capacity for archiving in a symbolical logic for the users, which would allow him to make his expressions about the computer design knowledge and to access the computer for an adequate representation of their meaning.

## 2.2. Models

The designees created with CAD system are excerpted and imported in the structural models for making the models of finished element. These models are imported then into an analyses programme with finished element to create moulds of material and of rigidity, distribution for solicitation from the material, ways of deformation and correct coefficient of tensions. The resulting dates are used by the dynamic simulation programme of stamps and dies, resulting the loading component that are combined with correct coefficient to create solicitations and tensions in critical zone of component elements(fig. 1).

In concordance with these I submit at a dynamic solicitation a part of a moulding that is a base assembly where are active parts of the stamps. This moulding made of gnarled cast iron was sectioned without a sidewall so that to see inside how a cell works without a sidewall. In practice, all the cells are closed and the sidewalls have more consolidate.

It could be observed that the stamps for the stamping have big loading in the connecting zones between two areas where the materials is forced to flow after two directions or the deformation takes place with making the material thin.

The stamps for cutting out, perforation and cutting are the most solicitation along the cutting knives and dies. From these observations I did measures on the parts and on the stamps after the stamp made 10.000 parts. The sides of the parts and all their physical size were compared with ideal projection part on the computer. The measures were made with high quality equipment coupled on the computer which offer us difference between it and the mathematic part. The dates were written in the Excel table were processed making a graph to evidence the constant different size. The parts were chosen with small size for an easy measure and an easy using of stamps on the press.

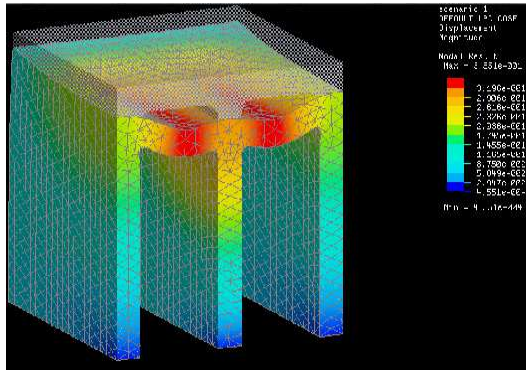


Fig 1. Solicitations and tensions in critical zone of component elements.

These parts are shown in the next picture (fig. 2):

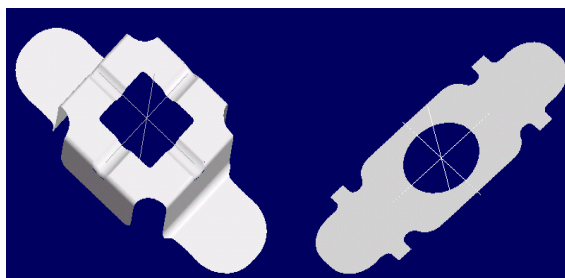


Fig 2. The parts were chosen with small size for an easy measure and an easy using of stamps on the press.

The results of the measures in the Excel tables are in the next pictures fig. 3, fig. 4:

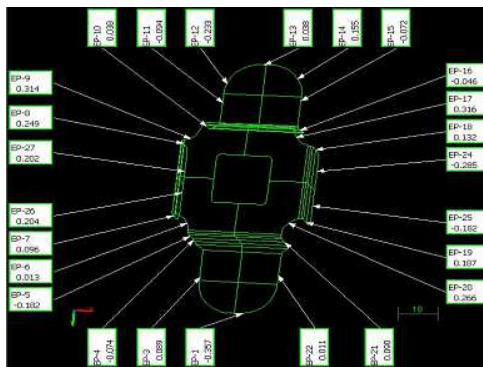


Fig 3. The results of the measures.

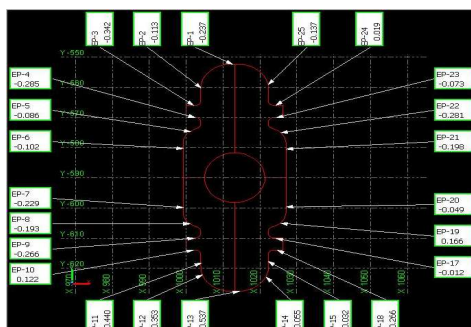


Fig 4. The Deviation of the Sizes from the Nominal Value.

The fundamental developments made by simulating technology and programmes up till now permit the quantitative prediction of the stamps and dies, based on their structure and component elements, long time before making and testing the prototype.

Using simulating programmes, the team can realise the prediction of the performance and the reliable characteristics and can evaluate the changes of the blueprint.

To maximal the blueprint is to integrate the maximal methods in a CAD/CAE medium. This fact leads to the maxim of the blueprint of the component elements, thus it is possible to analyse the shortcomings in the blueprint stage to analyse the way of the deficiency, to analyse the accessibility and behaviour of the stamps and the dies in their working place.

The passing from serial engineering to simulation can be realised by exploiting the existent blueprint methods to obtain the reliable characteristics before realising and testing the prototype. To maxim the blueprint is a long-term purpose, it can be realised through simulation.

The evolution of the blueprint methods and techniques required by the blueprint functions implies a significant change of the blueprint methods, which must realise the convergence of the highest characteristics with the reliable ones. Although the evolution of the project methods is relatively independent of the functions, which must be realised during the projection, this is a dependent on the CAE evolution and simulation methods.

If there are many events as decisions type which occur in the same time, than their processing order will be given by certain rules that must be included in the simulating programme. Among the ordered rules could be included (as concerned the system particularities) and the aleatory rules, too.

Today the dedicated programme packets don't put in evidence all these stages and they require only the module you work in, the technological limits of the used material and the nature of the forces that load the given system. Thus we can introduce in the prepared system the part or the assembly of parts where it can be described the movements' types between the parts and the existent coupling type.

After this we can activate the calculation module in the respective context. To see how the part behaviours at its stamp deformation, we made the above-mentioned stages then we processed the numeric value in different points considered fragile by the system. The system also presented the dynamic deforming model and thus we could observe the maximum solicitations occurred in the colour palette. After these it could be taken decisions that declare the part is well projected technological because functional speaking it is verified in a real time by the 3D used programmes. If the holes appeared on the part it means the part was wrong in its projection and the execution technological must be reprocessed.

We considered the superior part as a die and the inferior part as a press, we loaded the system with the necessary

force uniform distributed on the respective surface and we introduced an iron plane between them. We calculated the resilience coefficient of the material, the type of material and its thick. We also introduced the deforming speed resulted from the calculation and the type of used stamp. After the dynamic simulating we obtained a film in which the time was divided into 50 units.

To evidence the most important moments we extract two moments at 40 and 50 where we can see the beginning of the part dangerous elongation (fig. 5, fig. 6). The last moment shows us the iron plate suffered an effort that exceeded the resilience coefficient led to the appearance of the holes.

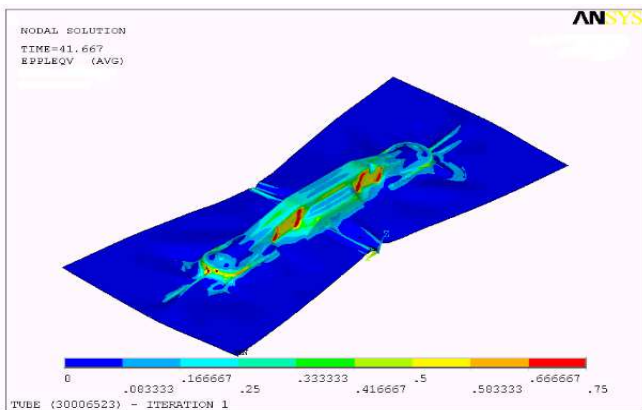


Fig 5. Dynamic simulating, moments at 40.

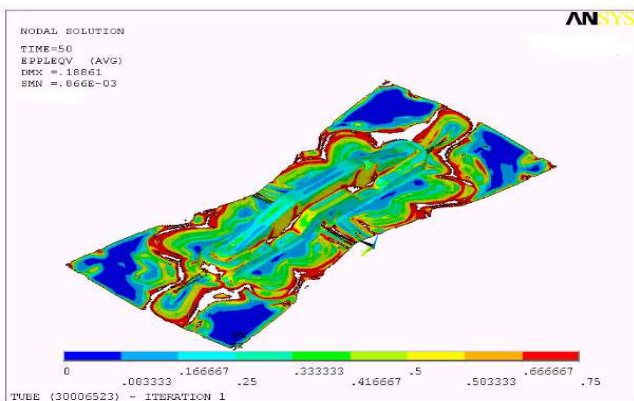


Fig 6. Dynamic simulating, moments at 50.

Due to the fact, the part couldn't be processed in only a stamp we asked the programme to simplify the surfaces where simulated process resulted a pre-stamp with wide angles. These don't grow the iron plate thinner between the press and the die.

In the projecting technology we came with new down surfaces. These allowed not to creasing the active part of the pieces. At the second stamp-sizing the part was good without any new holes.

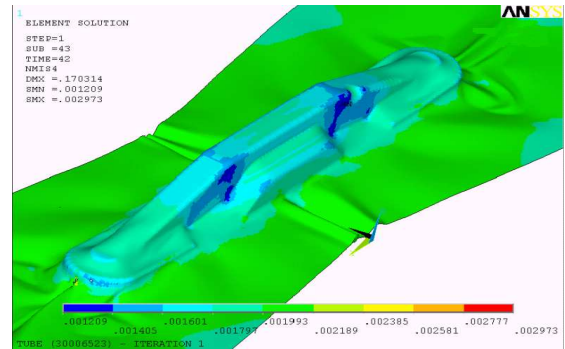


Fig 7. Dynamic simulating.

These colour-measured pictures help us to see the appeared on the part (fig. 7).

The spread of computer stations and networks, of the advanced methods of computer simulation, provides to the design engineers and specialists from the reliability the possibility to use the data and the analysis methods during design, to:

- Evaluate the different characteristics of reliability, as dies or moulds are created in a CAD modelling environment;
- Identify the failure modes and failure analysis for reliability prediction using the computer simulation before to prototype manufacture and testing of moulds or dies;
- Simulation of the manufacturing process together with the anticipated effect of the design changes on cost and efficiency of production;
- Finding and rules that help the design engineers in the efforts for optimizing the reliability characteristics with other performance characteristics of dies and moulds.

Although the mechanical systems data are relatively low, by adapting the methods of simulation and the CAD packages available, it can be created a working environment so that they become part of the mechanical design for reliability.

### 3. Conclusion

On these surfaces the iron plate rules strongly on the press and the die finally leading to a more rapid wear and tear. This thing can imply using the high mingled materials which are more expensive so that in the end the wear and tear of the press and the die to be more uniform and to resist in time at the projected number of the parts. Thus we can reach the reliable imposed by the die owner and we can use rational materials implied in the stamp building. We can finally have smaller costs. Beginning with the classic projection of the stamp and the die this paper wants to improve the technology to reduce the variability of the process and the cost of the products by applying some modern process of analysing and projecting.

### References

- [1] Tofan C.A., *Improving the quality and reliability of pressing technology aided design by cold and computer simulation*, "Alma Mater" Publishing House, Sibiu, 2012.

- [2] Tofan, C. A., Tofan P., The simulation on the computer for the quality of industrial processes, COSME 04, International Symposium "Transilvania" University, Brasov , 2004
- [3] Tofan, C. A., Advanced simulation methods and design assisted to dies and molds, Tribuna Economica, no. 48, 2008 ISSN 1018-0451
- [4] Morariu, C. O., Şimon, A.-E. - *Studies Concerning the Estimation of the Location Parameter for Weibull Distribution*, Technical University of Sofia, pag. 323–326, ISBN 954- 580-158-1, Bulgaria, 2004.
- [5] Martinescu, I., Popescu, I. - *Reliability analysis and security technology systems*, "Transilvania" University Publishing House, Brasov, 2002
- [6] Keil, M. - *Project Management. Managing IT Project Risk*. Information Technology CIS 8150, 2004
- [7] Hsin-Hung, W. - *Process Capability Indices for Skewed Process Data*. Department of Industrial Engineering and Management, Chien Kuo Institute of Technology, Nr. 1, Changhua City, Taiwan 500, 2002.
- [8] Cătuneanu, V. M., Popenţiu, F., *Reliability Fundamentals*, Elsevier Press, 1989.